

D-200 *by*



2" POLYURETHANE INSULATED SECTIONAL OVERHEAD COMMERCIAL DOOR


- ✓ White-colored insulated sections fabricated from pre-painted, hot dipped galvanized steel with rigid polyurethane insulation core, CFC and HCFC free, stucco embossed face sheet.
- ✓ Sections feature thermal break, steel-polyurethane-steel sandwich formed by continuous process.
- ✓ Sections formed with ship-lap joint.
- ✓ Continuous horizontal reinforcing strip for hinge mounting.

**10 YEAR
LIMITED
WARRANTY**

**Serving Detroit, Flint, Lansing, Pontiac, Port Huron,
Saginaw & Everywhere in Between!**

www.doverdoesit.com

D-200 by Dover Specs:

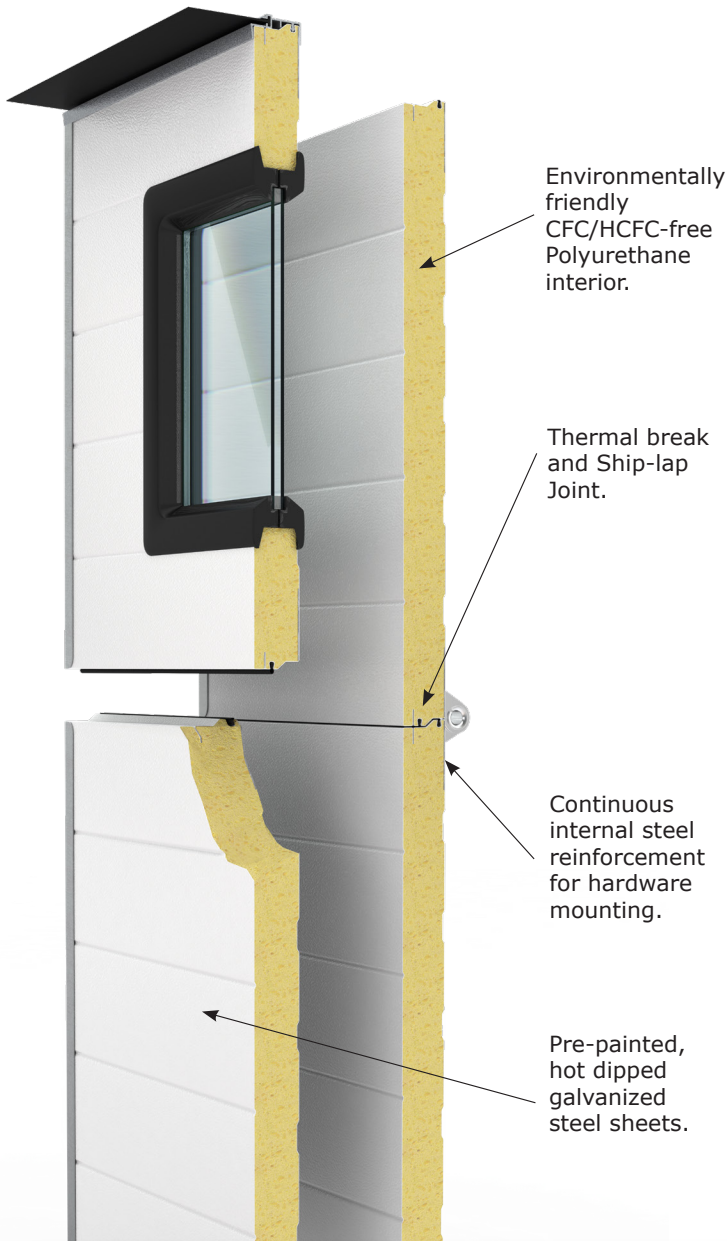

SECTION THICKNESS 2"

THERMAL VALUE R18.28


FACE SHEET PROFILE V-Groove

FACE SHEET THICKNESS 27 Gauge


MAXIMUM OPENING WIDTH 30'-2"

MAXIMUM OPENING WIDTH 22'

GLAZING OPTIONS



**Type CPL
(24"x 8")**




**Type E
(24"x 12")**



Flint: 810-235-2573
Lansing: 517-329-5070
Pontiac: 313-737-7098
Saginaw: 989-355-1519

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1"	4	8'-0" to 9'-2"	2
8'-2" to 10'-1"	5	9'-3" to 12'-2"	3
10'-2" to 12'-1"	6	12'-3" to 16'-2"	4
12'-2" to 14'-1"	7	16'-3" to 19'-2"	5
14'-2" to 16'-1"	8	19'-3" to 24'-2"	6
16'-2" to 18'-1"	9	24'-3" to 40'-2"	7

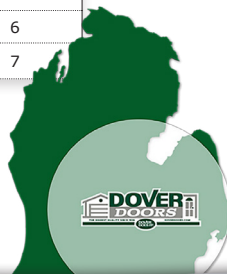

www.DoverDoesIt.com