

# D165 *by*




## 1 5/8" POLYURETHANE INSULATED SECTIONAL OVERHEAD COMMERCIAL DOOR

- ✓ White-colored insulated sections fabricated from pre-painted, hot dipped galvanized steel with rigid polyurethane insulation core, CFC and HCFC free, stucco embossed face sheet.
- ✓ Sections feature thermal break, steel-polyurethane-steel sandwich formed by continuous process.
- ✓ Sections formed with ship-lap joint.
- ✓ Continuous horizontal reinforcing strip for hinge mounting.

**10 YEAR  
LIMITED  
WARRANTY**

Serving Detroit, Flint, Lansing, Pontiac, Port Huron, Saginaw & Everywhere in Between!

# D200 *by Dover* Specs:

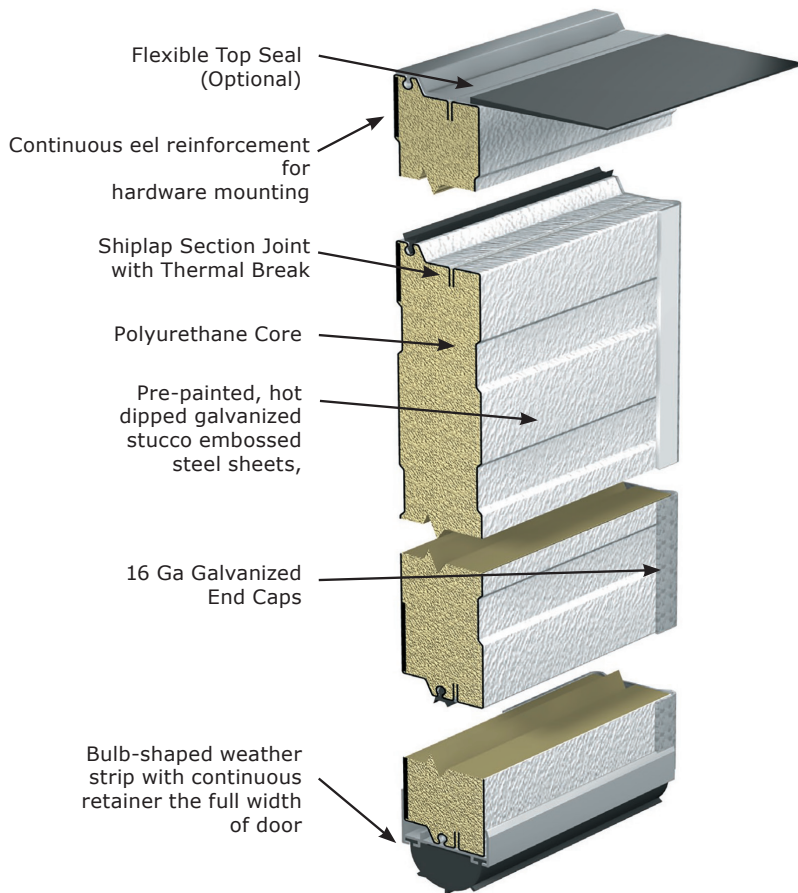

**SECTION THICKNESS 1 5/8"**

**THERMAL VALUE OF SECTIONS R14.45**


**FACE SHEET PROFILE Ribbed**

**FACE SHEET THICKNESS 27 gauge**

**MAXIMUM OPENING WIDTH 35'-2"**

**MAXIMUM OPENING HEIGHT 24'**

## GLAZING OPTIONS

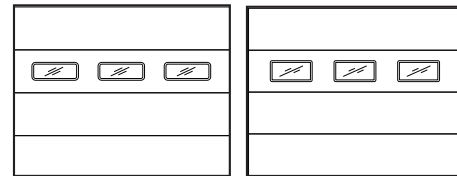

**Type CPL  
(24"x 8")**

**Type E  
(24"x 12")**

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1"	4	8'-0" to 9'-2"	2
8'-2" to 10'-1"	5	9'-3" to 12'-2"	3
10'-2" to 12'-1"	6	12'-3" to 16'-2"	4
12'-2" to 14'-1"	7	16'-3" to 19'-2"	5
14'-2" to 16'-1"	8	19'-3" to 24'-2"	6
16'-2" to 18'-1"	9	24'-2" to 35'-2"	7



**Professionally installed and serviced by:**

**Visit our showroom**  
 2435 S Grand Traverse St, Flint, MI 48503  
 810-235-2573